


Technical data sheet

Roof conductor holder for tiled roofs, Rd 8–10

Item number: 5215609



- Conductor holder of polyamide
- Including drill hole in bottom section for quick installation

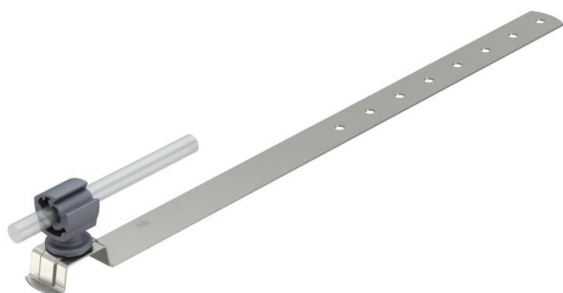


A2 Stainless steel

Master data

| | |
|---------------------|-----------------------|
| Item number | 5215609 |
| Type | 157 FK-VA 410 |
| Description 1 | Roof conductor holder |
| Manufacturer | OBO |
| Dimension | 8mm |
| Material | Stainless steel |
| Smallest sales unit | 20 |
| Unit of quantity | Piece |
| Weight | 10.25 kg |
| Weight unit | kg/100 pc. |

Dimensions

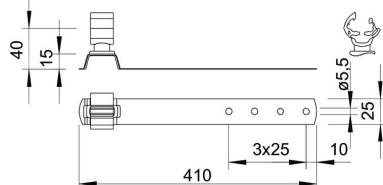

| | |
|-------------|--------|
| Length | 410 mm |
| Dimension L | 410 mm |

Technical data sheet

Roof conductor holder for tiled roofs, Rd 8–10

Item number: 5215609



Technical data

| | |
|--------------------------|-----------------------|
| Application | Roof surface |
| Conductor fastening type | With clamp clip |
| Conductor diameter, max. | 10 |
| Conductor diameter, min. | 8 |
| Mounting type | Screw-on |
| Mounting height | 40 mm |
| Fit | Rd 8-10 mm |
| Material of the holder | Plastic |
| Material of the support | Rustproof steel (V2A) |