

# Technical data sheet

## Wall and support bracket MWAM 12

Item number: 6424556



Light-duty wall and support bracket including quick connector for use with cable trays of type RKSM.

Wall and support bracket MWAM.. including:

1. Two pre-mounted quick connectors for efficient cable tray fastening.
2. Truss-head bolt M10 x 25 for fastening on the U support.  
Including truss-head screw M10 x 25 for fastening to U supports.



**St** Steel

**FS** Strip galvanized

### Master data

Item number	6424556
Type	MWAM 12 41 FS
Description 1	Wall and support bracket
Description 2	including quick fastening
Manufacturer	OBO
Dimension	B410mm
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	1
Unit of quantity	Piece
Weight	69.7 kg
Weight unit	kg/100 pc.

### Dimensions

Length	38 mm
Width	410 mm
Width	16 in
Height	83 mm
Height	3.27 in
Dimension A	38 mm
Dimension B	410 mm
Dimension H	83 mm
Maß W	410 mm

# Technical data sheet

## Wall and support bracket MWAM 12


Item number: 6424556



### Technical data

Version for	Wall and support bracket
F in kN	1.2 kN
Maintain electrical functions	no
Hole diameter	11 mm
Rustproof steel, pickled	no
Angle range, max.	90 mm
Angle range, min.	90 mm

### Loads

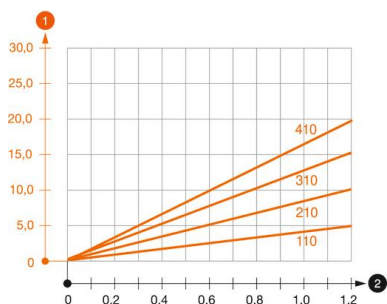

#### Load diagram, bracket type MWAM 12


- 1 Bending of the bracket tip at permitted bracket load
- 2 Permitted bracket load in kN without man load
- Load curve with bracket lengths in mm

### Characteristic anchor load values for wall and support bracket MWAM 12

Wall fastening	Max. load [kN]			
	Bracket width [mm]			
Anchor type	110	210	310	410
BZ3 10x90/0-30	1.2	1.2	1.2	1.2

Die angegebenen Werte basieren auf ungerissenen Beton der Festigkeitsklasse C20/25. Die Einbaubedingungen der ETA-Zulassung (Dübel) sind zu beachten!

### Load values for MWAM 12 on support



Support	Max. total load F in kN			
	Bracket length in mm			
	100	200	300	400
US 3 K/ 20 - 60	1.2	1.2	1.2	1.2
US 3 K/ 70 - 120	1.2	1.2	1.2	1.2
US 5 K/ 20 - 60	1.2	1.2	1.2	1.2
US 5 K/ 70 - 120	1.2	1.2	1.2	1.2